


# Z3U-V05-W (ANGLE 160)



## - LIGHT DISTRIBUTION (160°)

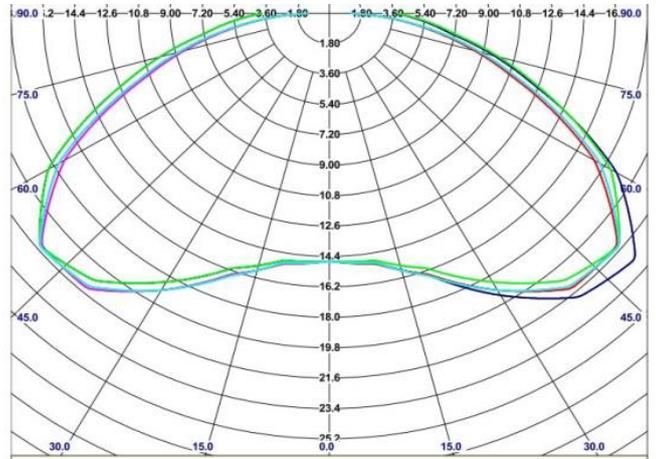

### FEATURES

- SAMSUNG LED 2835 CHIP**
- WIDE BEAM ANGLE 160°**
- LONG LIFE TIME (MORE THAN 50,000hrs at L70)**
- RESERVE VOLTAGE PROTECTION CIRCUIT**
- WIDE VIEWING ANGLE FOR EVEN LIGHT FLUX**
- CAPABLE OF WET EXPOSED APPLICATIONS WITH DURABLE WEATHER PROTECTIVE MOLDING**
- PRE-APPLIED ADHESIVE TAPE AND SCREW MOUNTING BOLT**
- SAFETY OPERATION WITH DC 12V**


### CERTIFICATIONS




**CE, UL(E349550), RoHS, KC, IP68, CB, BIS**

### DESIGN PATENT

**US D858, 809S US D861, 922S**

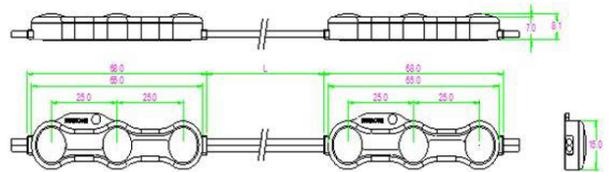

### PRODUCTION DEMENTION & PACKAGE

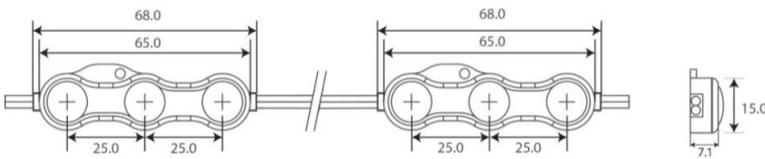

DEMENTION	WIRE LENGTH	ZIPPER POLYBAG/QTY	OUTER BOX/QTY
68x15x7.1mm	78mm (3.15inch)	200pcs/bag	2,000pcs/box

### SPECIFICATION

Operation Votage	Color Temperature	Power Consumption	Current	Viewing Angle	Intensity		Operation Temperature	Storage Temperature	Water Proof
					Lm	lm/W			
DC12V	WARM WHITE	1.14W	100mA	160°	120	105	-20°C~60°C (-4°F~140°F)	-40°C~75°C (-40°F~167°F)	IP68
	COOL WHITE				126	110			