

# 2835 LED STRIPS

60/120 LEDs/m



### Features

- Powered by high output 2835 LED.
- CRI > 80.
- SDCM ≤ 5, 1 BIN only.
- Double layer rolled copper FPC.
- 3M 300LSE tape attached.
- CE, RoHS, UL, TUV, BIS, CB and LM-80 certified.

### Application

- Linear lighting, city lighting, landscape lighting, commercial lighting and house contour lighting, etc.




### Parameters



Part Number	Dimensions (mm)	LED Type	LED Qty/m	Voltage (V)	Power (W/M)	LM/M	CCT/K	IP Grade
SE60LCJ-8C	10000*8	2835	60	DC12/24	5	550	3000/4000/6500	IP20
SE60TCJ-8C	5000*8	2835	60	DC12/24	5	550	3000/4000/6500	IP67
SE60JCJ-8C	5000*8	2835	60	DC12/24	5	550	3000/4000/6500	IP68
SE120LCJ-8C	10000*8	2835	120	DC12/24	10	1050	3000/4000/6500	IP20
SE120TCJ-8C	5000*8	2835	120	DC12/24	10	1050	3000/4000/6500	IP67
SE120JCJ-8C	5000*8	2835	120	DC12/24	10	1050	3000/4000/6500	IP68

### Dimension




Unit: mm

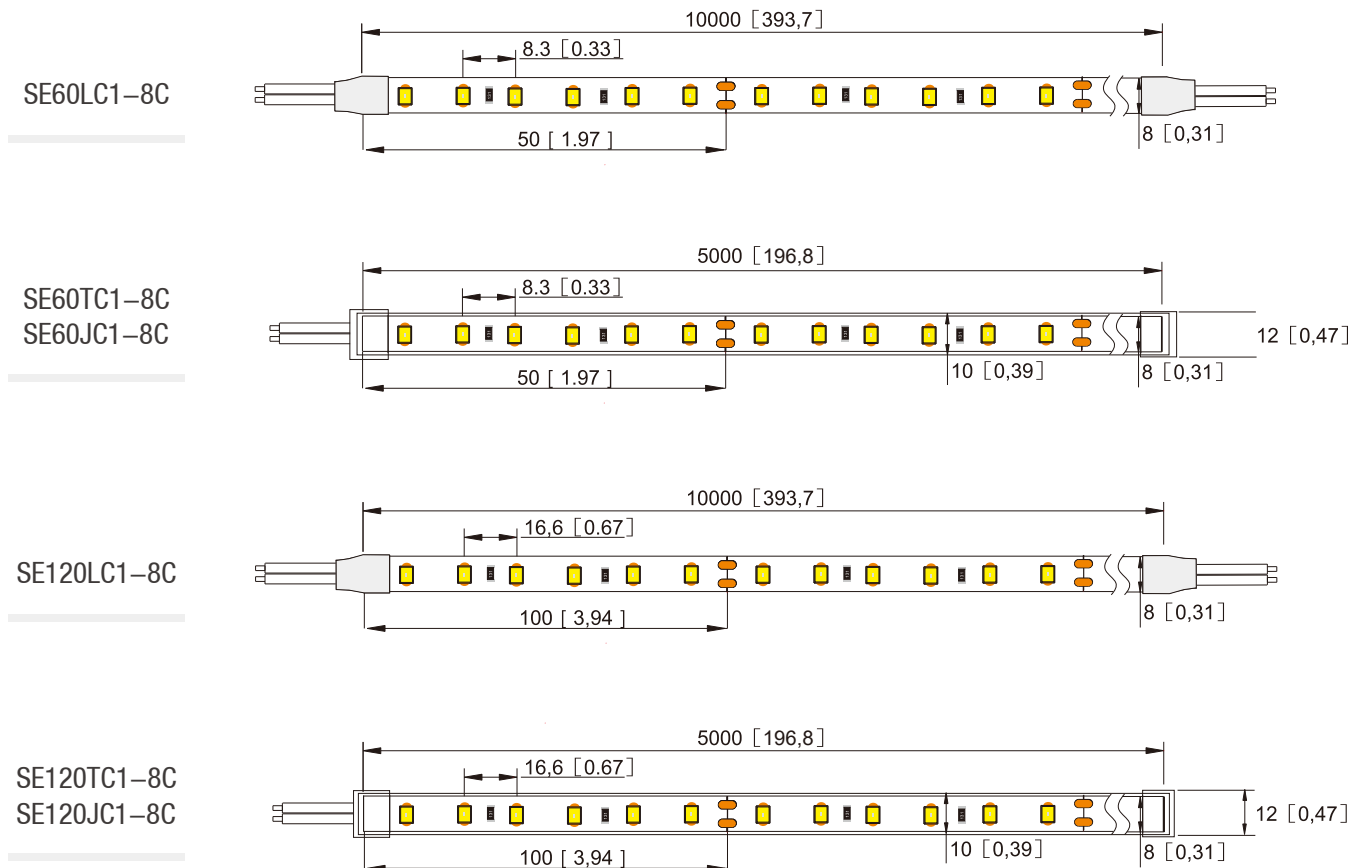


### Rendering Index Comparison

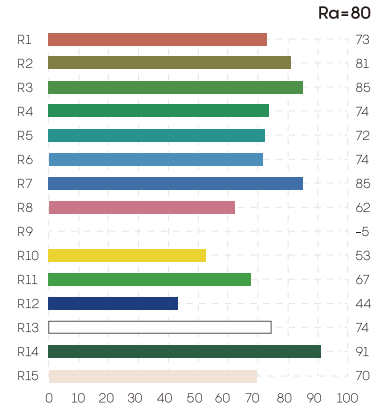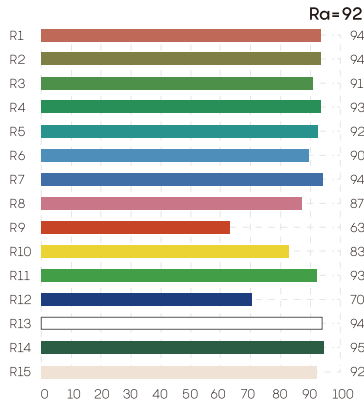


### LBY LED Provides Different IP Graded Strips

<b>IP20</b>	non-proof		LED FPC	(indoor)
<b>IP67</b>	silicon pipe		Silicon glue LED FPC	(in rain)
<b>IP68</b>	silicon		Silicon glue LED FPC	(in water)


### LBY LED Provide Full CCT Range From 2700K to 6000K

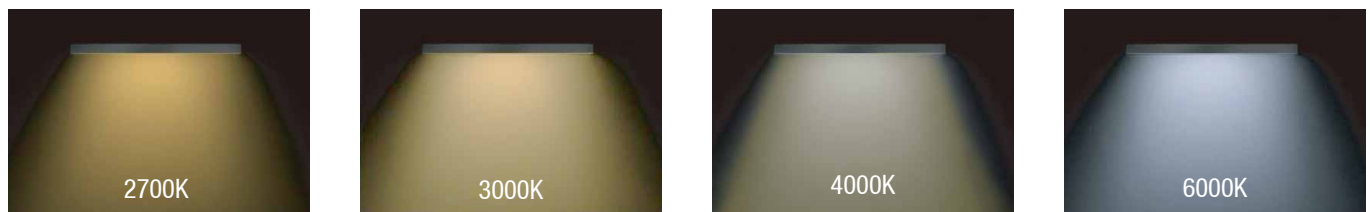





## Beaming Angle

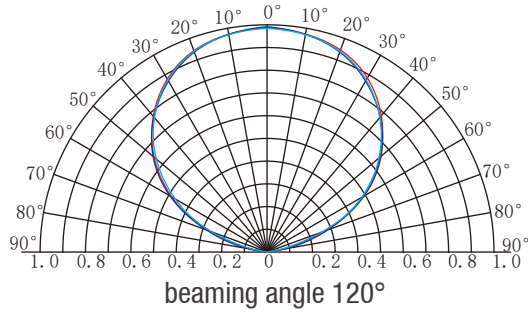

## Wire Connection

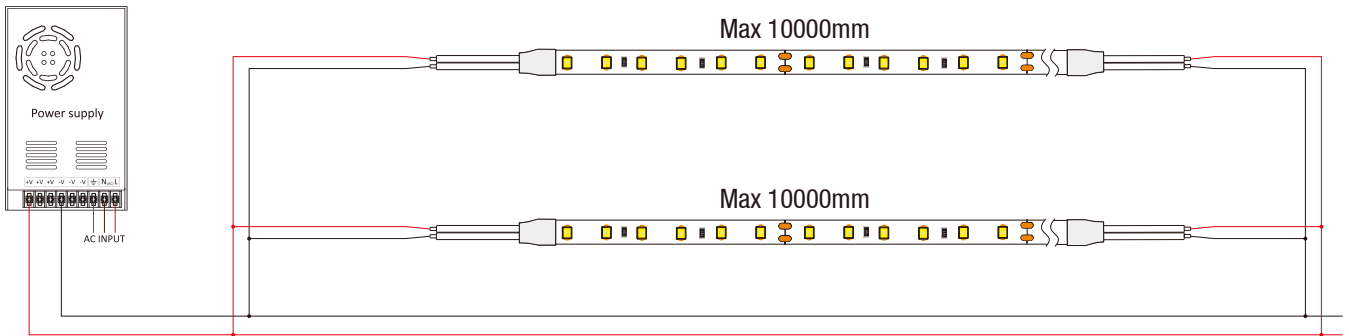

## Packing information



10 meters per roll

One roll per antistatic bag

25 rolls per inner box


500m per carton IP20

Part Number	Carton Dimension (mm)	Bags Per Carton (pcs)	Quantity Per Carton (m)	Net Weight (kg)	Gross Weight (kg)
SE60LCJ-8C	480*345*270	50	500	6.9	8.6
SE60TCJ-8C	480*345*270	50	250	8.2	10.2
SE60JCJ-8C	480*345*270	50	250	15.5	17.5
SE120LCJ-8C	480*345*270	50	500	8.2	9.9
SE120TCJ-8C	480*345*270	50	250	8.7	10.7
SE120JCJ-8C	480*345*270	50	250	16.5	18.5

Given the packing manner difference, the actual packing information is subject to that for the real products.

### Cautions

When install the led strip, please note the installaiton technique. The led strip can be bent, but not distorted, as shown below.

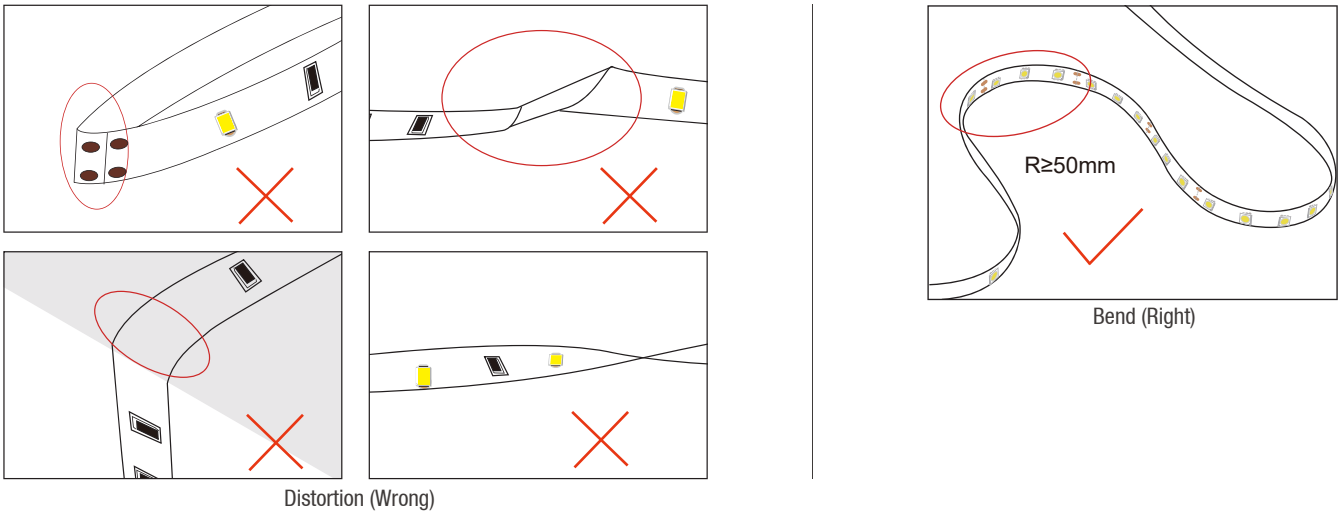

➤ LED strips are low vottage products, you must use the power supply(transformer). Please don't connect the led strip directly to the AC 110V or AC 220V, otherwise it will burn out the LED strips.

➤ Clean up the installation surface, it will ensure the reliability of the adhesive, .The electrical connection process must be operated by a professional person.

### Installation Guidance


Accessories	Item No.	Description
Solderless Connector	LBY-JXD20-D1/D2/T1/T2	Insert the wire and close the cover
Strip-to-Wire Connector	LBY-N12XB-2G/QJ-SE-N12XB-2G	Insert the wire and strip and ensure secure contact
Strip-to-Strip Connector	LBY-N12BB-2G/QJ-SE-N12BB-2G	Insert both strips and ensure secure contact



- Clean the installation surface.
- Mounting with 3M tape.
  - (1) Unroll the led strip.
  - (2) Peel the adhesive tape.
  - (3) Stick the led strip into place.



- Mounting with clip.
  - (1) Unroll the led strip.
  - (2) Mount with fixing clip and secure with M3\*6 screws.



- Connect to the power supply and proceed with insulation treatment. Make sure that the polarity for connection is correct. Note: Red wire is positive and black wire is negative.
- Electrify the power supply.

## Instructions

01. Disassembling or modifying the product is not allowed.
02. Installation with power on is not allowed.
03. Any organic solvent chemical is not allowed.
04. Isolation and corrosion prevention on all wiring points and wire ends.
05. Make sure the power wire is big enough and ensure the voltage and connection are all correct before power on.
06. Installation, maintenance should be done by professional staff.
07. 10M in a serial connection maximum for DC 12/24V strips.
08. The power wire between power supply and LED strips should be less than two meters to keep the same brightness on all parts.

## Declaration

01. Warranty: 3 years.
02. To ensure the safety, the broken wires need to be replaced by the manufacturer or the service agent, or by the qualified staff.
03. The given data in the specification is the laboratory data, there may be discrepancy found in the actual products.
04. The given drawings in the specification are only for reference, there may be discrepancy found in the actual products.
05. The products are subject to change without prior notification.



## SHENZHEN LINGBENYANG IND. CO., LTD.

Tel: +86-755-83544570

E-mail: [info@lbyled.com](mailto:info@lbyled.com)

Fax: +86-755-83056229

[Http://: www.lbyled.com](http://www.lbyled.com)

Company Address.: 28F, Luban Building, Hongli West Road, Futian District, Shenzhen 518034, China

Factory Address: 6F, Xinyongfeng Industrial Area, Yingrenshi Village, Shiyan Town, Bao'an District, Shenzhen 518108, China